
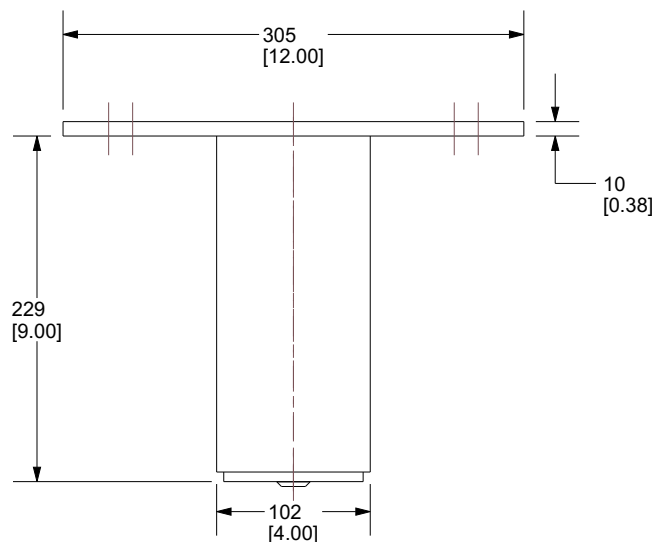
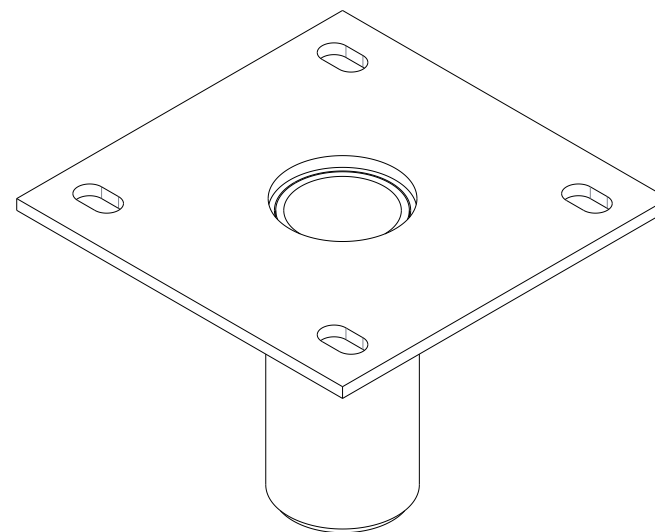



PRODUCT NUMBER: IN-2006

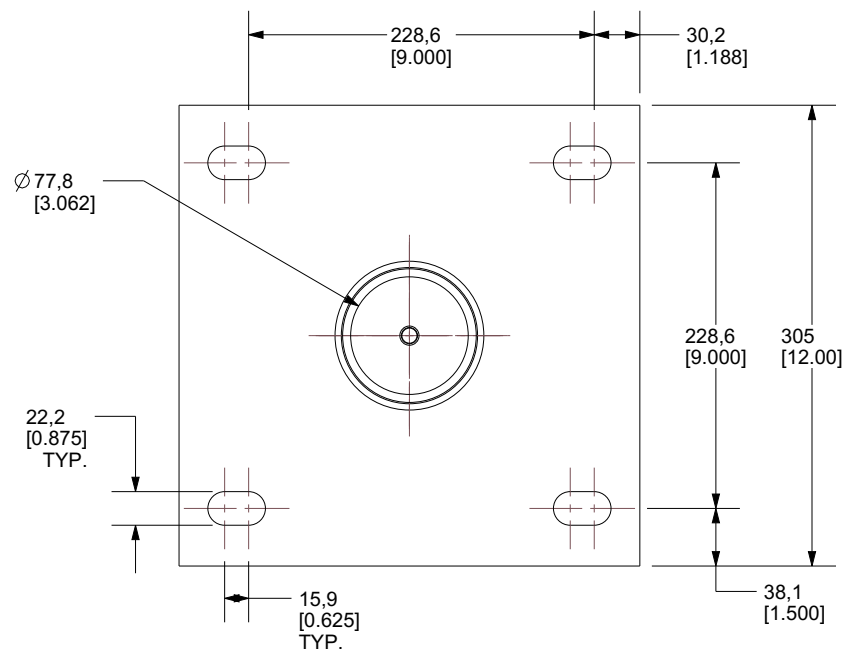



INNOVA PUBLIC UTILITY PRODUCTS INC.					
TITLE:					
76mm (3") FLUSH FLOOR ADAPTER					
SS (304)					
WEIGHT :		DRAWN BY:		VERIFIED BY:	
(kg)	(lb)	P.PETIT			
10.0	22.1	DATE:			
		24/04/2009			
		SCALE:			
		1:5			
MATERIAL:		SHEET(S):		FORMAT:	
SS 304		1 / 4		A	
		No. DRAWING:		REV.:	
		DA2006-01		ANG 08	
<small>© 9105-0732 QUEBEC INC., under exclusive license to PRODUCTS DE SERVICES PUBLICS INNOVA INC., (hereinafter "INNOVA"). All rights reserved. Protected by the Copyright Act in Canada and international treaties and conventions relating to copyright. Violators are subject to criminal prosecution and other legal remedies for infringement. Any reproduction, adaptation or other use or disclosure of any kind, in whole or in part, and in any form or by any means whatsoever either, is strictly prohibited and requires the prior written consent of INNOVA. The data is the exclusive property of 9105-0732 QUEBEC INC., under exclusive license to INNOVA and cannot be used or disclosed in any way without the prior written consent of INNOVA.</small>					

# BASE INSTALLATION REQUIREMENTS



## FULL THICKNESS INSTALLATION

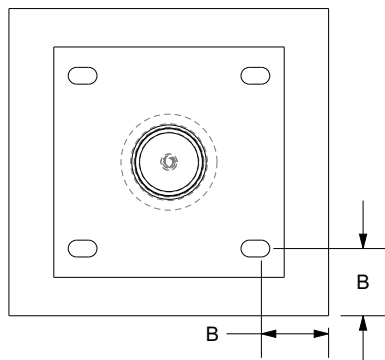


## SANDWICH INSTALLATION

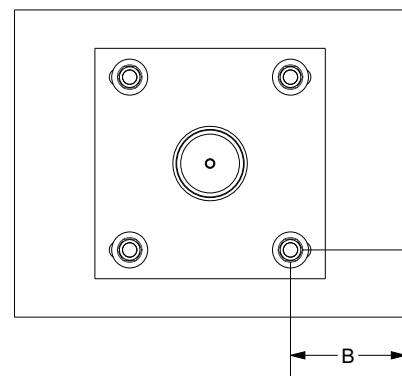

P2006-006  
SANDWICH PLATE  
(OPTION)




DISTANCE BETWEEN CENTER OF MAST  
AND DAVIT ARM CABLE  
610  
[24.00]  
MAX.

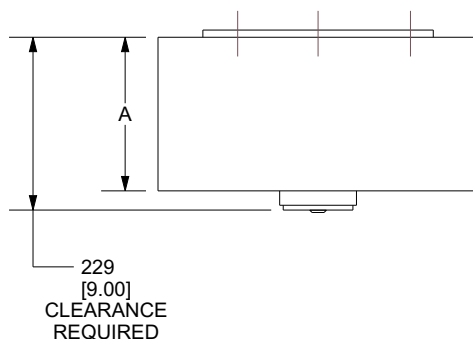


IN-2174  
(OPTION)



IN-2212  
(OPTION)



PERMISSIBLE  
WORKING  
ANGLE



PERMISSIBLE  
ANGLE  
OF  
RECUPERATION

PRODUCT NUMBER: IN-2006

ANSI, AS / NZS, CSA, OSHA

	FULL THICKNESS	EXAMPLE *	SANDWICH	EXAMPLE *
MINIMUM THICKNESS (A)	REFER TO FASTENER MANUFACTURER SPECIFICATIONS	203 mm (8.00")	TO BE DETERMINED BY THE LOCAL ENGINEER	152 mm (6.00")
MINIMUM EDGE DISTANCE (B)	REFER TO FASTENER MANUFACTURER SPECIFICATIONS	152 mm (6.00")	TO BE DETERMINED BY THE LOCAL ENGINEER	152 mm (6.00")
EMBEDMENT DEPTH	REFER TO FASTENER MANUFACTURER SPECIFICATIONS	152 mm (6.00")	N / A	N / A
MINIMUM PULLOUT STRENGTH PER FASTENER	19,8 kN (4 451 lbf)	19,8 kN (4 451 lbf)	19,8 kN (4 451 lbf)	19,8 kN (4 451 lbf)
MAXIMUM MOMENT APPLIED TO THE STRUCTURE	9,8 kN·m (86 400 lbf·in)	9,8 kN·m (86 400 lbf·in)	9,8 kN·m (86 400 lbf·in)	9,8 kN·m (86 400 lbf·in)
MAXIMUM VERTICAL LOAD APPLIED TO THE STRUCTURE	22,3 kN (5 000 lbf)	22,3 kN (5 000 lbf)	22,3 kN (5 000 lbf)	22,3 kN (5 000 lbf)


### NOTE:

1. IT IS THE RESPONSIBILITY OF THE LOCAL ENGINEER TO ASSURE INSTALLATION COMPLIANCE.
2. TO BE INSTALLED WITH 3/4" (M20) MINIMUM N STAINLESS STEEL ANCHORS. SMALLER ANCHORS MUST BE VALIDATED BY THE LOCAL ENGINEER.
3. ALL OTHER VARIATION MUST BE APPROVED BY THE LOCAL ENGINEER.
4. \*TYPICAL INSTALLATION CONCRETE FOR 21 MPA (3000 PSI) AND 0.2% GROSS AREA REBAR REINFORCEMENT.

INNOVA PUBLIC UTILITY PRODUCTS INC.

TITLE:



76mm (3") FLUSH FLOOR ADAPTER  
SS (304)

WEIGHT :		DRAWN BY:			
(kg)	(lb)	P.PETIT			
10.0	22.1	DATE:	24/04/2009		
		SCALE:	7:50		
MATERIAL:		SHEET(S):	FORMAT:	No. DRAWING:	REV.:
SS 304		2 / 4	A	DA2006-01 ANG	08



© 9105-0732 QUEBEC INC., under exclusive license to PRODUCTS DE SERVICES PUBLICS INNOVA INC., (hereinafter "INNOVA"). All rights reserved. Protected by the Copyright Act in Canada and international treaties and conventions relating to copyright. Violators are subject to criminal prosecution and other legal remedies for infringement. Any reproduction, adaptation or other use or disclosure of any kind, in whole or in part, and in any form or by any means whatsoever either, is strictly prohibited and requires the prior written consent of INNOVA. The data is the exclusive property of 9105-0732 QUEBEC INC., under exclusive license to INNOVA and cannot be used or disclosed in any way without the prior written consent of INNOVA.

# BASE INSTALLATION REQUIREMENTS

## FULL THICKNESS INSTALLATION

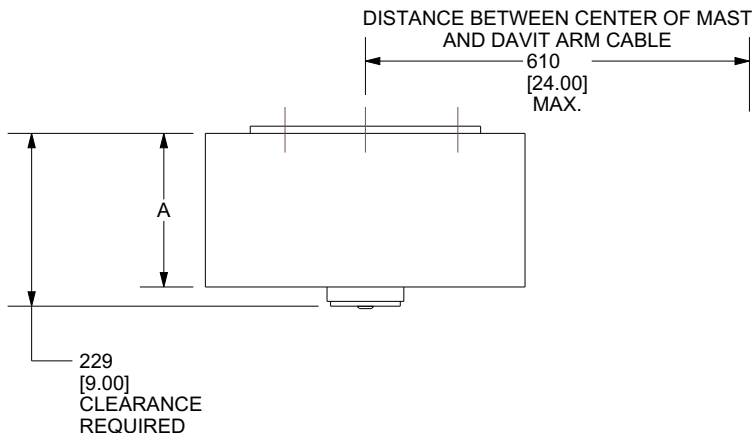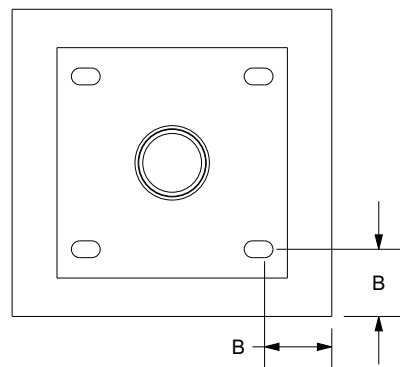

## SANDWICH INSTALLATION

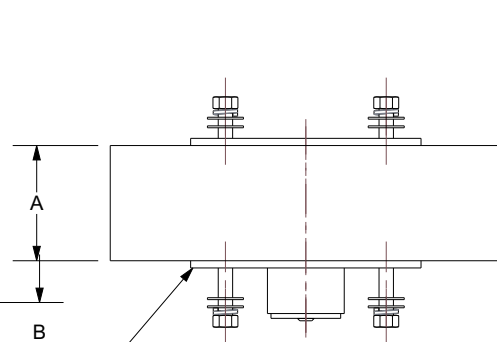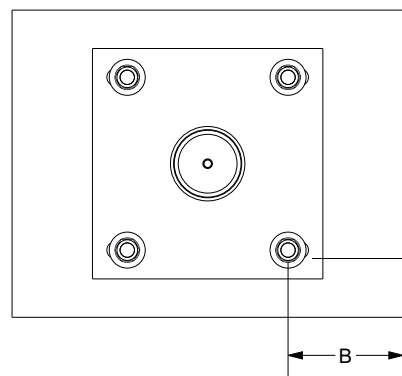




IN-2174  
(OPTION)




IN-2212  
(OPTION)



P2006-006  
SANDWICH PLATE  
(OPTION)



PERMISSIBLE  
WORKING  
ANGLE



PERMISSIBLE  
ANGLE  
OF  
RECUPERATION

PRODUCT NUMBER: IN-2006

EN 795, TS16415

	FULL THICKNESS	SANDWICH
MINIMUM THICKNESS (A)	REFER TO FASTENER MANUFACTURER SPECIFICATIONS	TO BE DETERMINED BY THE LOCAL ENGINEER
MINIMUM EDGE DISTANCE (B)	REFER TO FASTENER MANUFACTURER SPECIFICATIONS	TO BE DETERMINED BY THE LOCAL ENGINEER
EMBEDMENT DEPTH	REFER TO FASTENER MANUFACTURER SPECIFICATIONS	N / A
MINIMUM PULLOUT STRENGTH PER FASTENER	16,1 kN (3 619 lbf)	16,1 kN (3 619 lbf)
MAXIMUM MOMENT APPLIED TO THE STRUCTURE	7,9 kN+m (69 921 lbf-in)	7,9 kN+m (69 921 lbf-in)
MAXIMUM VERTICAL LOAD APPLIED TO THE STRUCTURE	13,0 kN (2 923 lbf)	13,0 kN (2 923 lbf)


### NOTE:

1. IT IS THE RESPONSIBILITY OF THE LOCAL ENGINEER TO ASSURE INSTALLATION COMPLIANCE.
2. TO BE INSTALLED WITH 3/4" (M20) MINIMUM N STAINLESS STEEL ANCHORS. SMALLER ANCHORS MUST BE VALIDATED BY THE LOCAL ENGINEER.
3. ALL OTHER VARIATION MUST BE APPROVED BY THE LOCAL ENGINEER.
4. \*TYPICAL INSTALLATION CONCRETE FOR 21 MPA (3000 PSI) AND 0.2% GROSS AREA REBAR REINFORCEMENT.

INNOVA PUBLIC UTILITY PRODUCTS INC.

TITLE:

76mm (3") FLUSH FLOOR ADAPTER  
SS (304)

WEIGHT :		DRAWN BY:		VERIFIED BY:	
(kg)	(lb)	P.PETIT			
10.0	22.1	DATE:			
		24/04/2009			
		SCALE:			
		7:50			
MATERIAL:		SHEET(S):		FORMAT:	
SS 304		3 / 4		A	
		No. DRAWING:		REV.:	
		DA2006-01		ANG 08	

© 9105-0732 QUEBEC INC., under exclusive license to PRODUCTS DE SERVICES PUBLICS INNOVA INC., (hereinafter "INNOVA"). All rights reserved. Protected by the Copyright Act in Canada and international treaties and conventions relating to copyright. Violators are subject to criminal prosecution and other legal remedies for infringement. Any reproduction, adaptation or other use or disclosure of any kind, in whole or in part, and in any form or by any means whatsoever either, is strictly prohibited and requires the prior written consent of INNOVA. The data is the exclusive property of 9105-0732 QUEBEC INC., under exclusive license to INNOVA and cannot be used or disclosed in any way without the prior written consent of INNOVA.

## SPECIFICATIONS

THIS EQUIPMENT IS CONSIDERED AS PART OF A PERSONAL FALL ARREST SYSTEM (PFAS).

IT IS ONLY TO BE USED IN CONJUNCTION WITH A PERSONAL FALL ARREST SYSTEM THAT LIMITS THE MAXIMUM ARREST FORCE (MAF) TO 8,0 kN.

WORKING LOAD LIMIT (WLL) :	164 kg (360 lb)
MINIMUM BREAKING STRENGTH :	16,0 kN (3 600 lbf)
MAXIMUM WORKING MOMENT :	1,0 kN•m (8 640 lbf•po)
MAXIMUM DESIGN MOMENT :	9,8 kN•m (86 400 lbf•po)

## STANDARDS

NAME	CLASSIFICATION	YEAR	USERS
ANSI Z359.1	A	2007	1
CSA Z259.2.1		1998	1
OSHA 1910.66 APP C			1
EN 795 (1)		2012	1
TS 16415 (1)		2013	2

## MATERIAL AND CONSTRUCTION

WELDING CERTIFICATION :	STRUCTURE :	HARDWARE :
STEEL / STAINLESS STEEL CSA W59.18 / CSA W47.1 / AWS D 1.6	STAINLESS STEEL 304	STAINLESS STEEL

## RESTRICTIONS


THIS EQUIPMENT SHOULD ONLY BE USED WITH PRODUCTS APPROVED BY INNOVA PUBLIC UTILITY PRODUCTS Inc.

THIS EQUIPMENT SHOULD ALWAYS BE USED ON A SURFACE LEVEL

MAKE SURE ALL HARDWARE AND CONNECTION PINS ARE PROPERLY INSTALLED BEFORE USE.

IN CASE OF FALL OR EQUIPMENT SAFETY IF IN DOUBT, THE EQUIPMENT SHOULD BE REMOVED FROM THE EQUIPMENT IMMEDIATELY. SERVICED AND INSPECTED BY A QUALIFIED PERSON BEFORE REUSE.

PRODUCT NUMBER: IN-2006

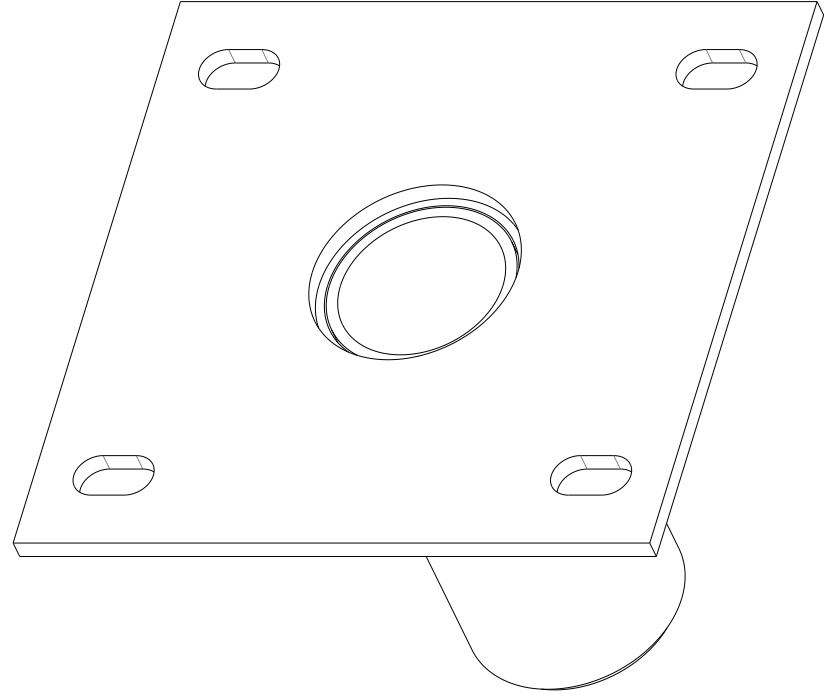


INNOVA PUBLIC UTILITY PRODUCTS INC.

TITLE:

76mm (3") FLUSH FLOOR ADAPTER

SS (304)

WEIGHT :		DRAWN BY:			
(kg)	(lb)	P.PETIT			
10.0	22.1	DATE:	24/04/2009		
		SCALE:	1:5		
MATERIAL:					
SS 304		SHEET(S):	FORMAT:	No. DRAWING:	REV.:
		4 / 4	A	DA2006-01 ANG	08

© 9105-0732 QUEBEC INC., under exclusive license to PRODUCTS DE SERVICES PUBLICS INNOVA INC., (hereinafter "INNOVA"). All rights reserved. Protected by the Copyright Act in Canada and international treaties and conventions relating to copyright. Violators are subject to criminal prosecution and other legal remedies for infringement. Any reproduction, adaptation or other use or disclosure of any kind, in whole or in part, and in any form or by any means whatsoever either, is strictly prohibited and requires the prior written consent of INNOVA. The data is the exclusive property of 9105-0732 QUEBEC INC., under exclusive license to INNOVA and cannot be used or disclosed in any way without the prior written consent of INNOVA.